

Mini Servo 81 410


- Use in areas with limited space, and/or for applications with low operating force
- With accessories and mounting materials
- With 2 control wires 100 mm, Ø 0.4 mm
- and 1 control wire 100 mm, Ø 0.6 mm
- Dimensions 20.0 x 17.6 x 8.0 mm
- Torque 4 Ncm
- Power 4.8 - 6 V
- Max. Operating angle 90°

Connections


white – control signal, red - 5 V, black - Earth

Tip: Quiet running of the working model can be improved by skillful bending of the control wire.


Example Applications

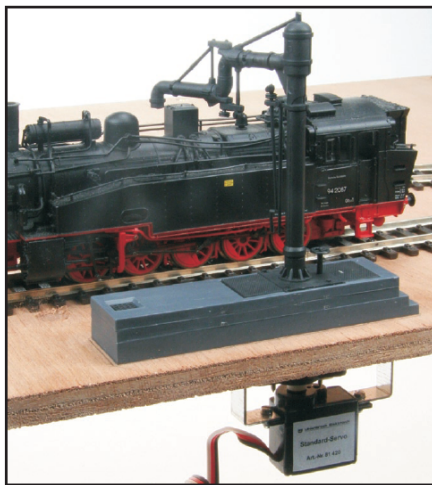

The direct connection of water crane and servo axle makes a precise positioning at the stop possible.

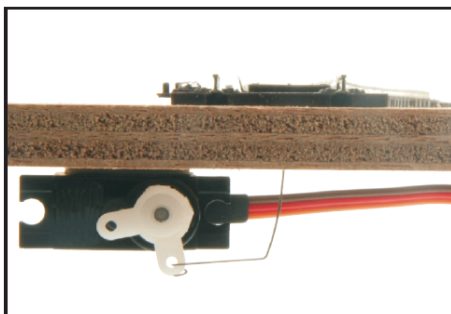

The bent control wire provides for a quieter operation of the turnout.

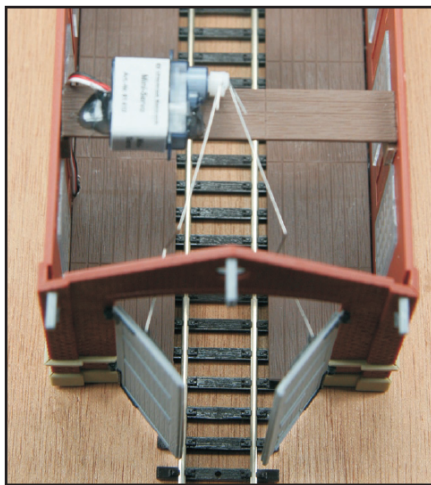

An axial offset is possible if the control wires are bent.

 Uhlenbrock Elektronik

Our contact Details: Service

In the event of a defect or failure send the unit together with the invoice and a short description of the fault back to us for repair.

Hotline

We are available if you have any questions!


Your direct line to a technician: **0 20 45 - 85 83 27**
Mon - Tue - Thu - Fri, 14:00-16:00 and Wed 16:00-18:00



4 033405 814107

Uhlenbrock Elektronik GmbH
Mercatorstr. 6
D-46244 Bottrop

Made in Germany

Electronic devices do not belong in household rubbish 

Part No. 81 410